

Wrap-Around Labelling Solutions




We deliver superior labelling solutions for C-wrap, U-wrap and full-wrap applications.



- Engineered for 24/7 operation
- Built for the food industry's strict demands
- Print engines can be mounted directly on the labeller
- Advanced applicators with speeds up to 200 packs pr. min.



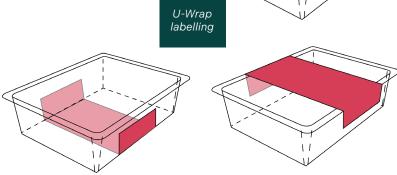

Efficient Food Labelling



C-Wrap labelling

C-wrap labelling is an efficient method of applying a large label to three sides of a food pack.

C-wrap labels typically come in two formats:

- Partial top coverage with one side and the bottom
- Full top coverage with both sides of the tray



U-Wrap labelling

U-wrap combines C-wrap and bottom labelling, making it easy to apply labels to the bottom and two sides of a food pack.

Labels are typically blown onto the sides and applied using 250 mm formats with an advance length between 70 and 110 mm.



Full Wrap labelling

Full wrap is the complete sealing of the product with a label, regardless of whether the pack is running narrow or wide edge first on the line.

Labels are typically up to 420mm long and 20-100mm wide.

C-Wrap labeller for trays

Technical specifications	
Dimensions	1750 x 900 x 1850 mm (LxWxH)
Label width:	10-300 mm
Label length	500 mm
Capacity:	30-120 packs depending on label and print size
Core diameter	76 mm
Accuracy	+/- 1 mm
Dispensing speed up to	0-100 m/min

Non-stop double bottom & U-wrap labeller

Technical specifications	
Dimensions	2600 x 900 x 1850 mm (LxWxH)
Label width:	10-300 mm
Label length	500 mm
Capacity:	50-250 packs depending on label and print size
Core diameter	76 mm
Accuracy	+/- 1 mm
Dispensing speed up to	0-100 m/min

Full-wrap labeller for trays

Technical specifications	
Dimensions	2400 x 900 x 1850 mm (LxWxH)
Label width:	10-300 mm
Label length	500 mm
Capacity:	50-80 packs de- pending on label and print size
Core diameter	76 mm
Accuracy	+/- 1 mm
Dispensing speed up to	0-100 m/min

